


WaterJet Filerglass Sand Filters are constructed by the latest engineering technology. The improvement of flow ability provides an extra pure water filtration. The Fiberglass winding design allows the filter to have extra strength and resistance to chemical and corrosives. WaterJet Fiberglass Sand Filters are the most recommendable equipment for the application of swimming pool and spa.

## WaterJet Sand Filters

### "V" series fiberglass top-mounted

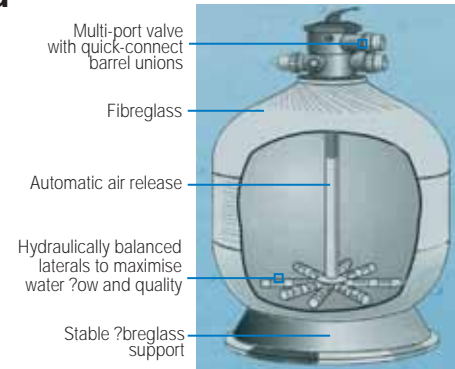

"V" Series technical data

Model	Tank dia mm	Height mm	Valve Port Size (mm)	Filter Area m <sup>2</sup>	Silica Sand kg	Design Flow lpm	Working pre kg/cm <sup>2</sup>
V400	400	740	40	0.13	30	105	2.5
V450	450	800	40	0.16	40	133	2.5
V500	525	840	40	0.22	85	192	2.5
V650	625	960	40	0.30	115	270	2.5
V700	710	1025	40	0.40	185	320	2.5
V750	750	1020	50	0.44	200	360	2.5
V800	800	1200	50	0.50	210	420	2.5
V900	900	1300	50	0.64	310	500	2.5
V1000	1000	1400	50	0.79	410	550	2.5
V1100	1120	1480	50	0.98	460	630	2.5
V1200	1200	1600	50	1.13	560	700	2.5


### "S" series fiberglass side-mounted



"S" series technical data

Model	Tank dia mm	Height mm	Valve Port mm	Filter Area m <sup>2</sup>	Silica Sand kg	Design Flow lpm
S450	470	730	40	0.16	40	133
S500	550	770	40	0.22	85	192
S650	650	850	40	0.30	155	270
S700	720	960	40	0.40	185	320
S800	820	1050	50	0.50	210	420
S900	920	1180	50	0.64	310	500
S1000	1020	1170	50	0.79	410	550
S1100	1120	1280	50	0.90	460	630
S1200	1220	1410	50	1.13	560	700

"V" and "S" Series pressure rating chart

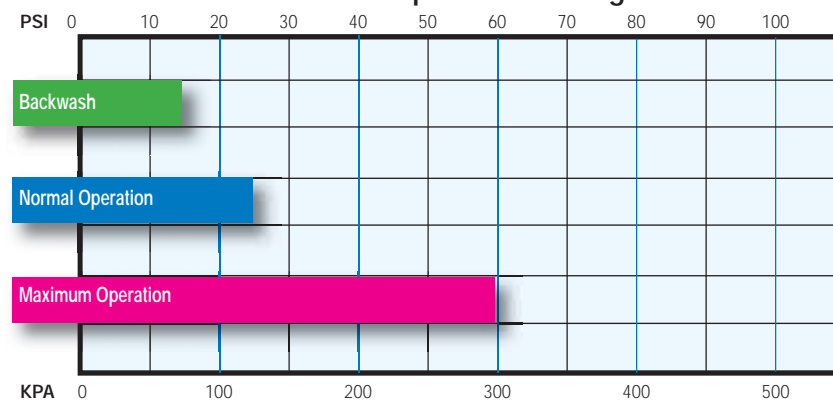

## WaterJet Commercial Sand Filters


### "L" Series fiberglass side-mounted



"L" Series technical data

Model	Tank dia mm	Height mm	Valve Height (mm)	Valve Distance (mm)	Valve Port Size (mm)	Filter Area m <sup>2</sup>	Silica Sand kg	Design Flow lpm
L1200	1220	1410	900	340	80	1.13	560	860
L1400	1400	1560	970	430	100	1.54	1900	1150
L1600	1600	1720	1100	500	100	2.00	2600	1500
L1800	1800	1870	1150	530	150	2.70	3240	2000
L2000	2000	2020	1200	550	150	3.14	4000	2350
L2300	2300	2300	1500	600	200	4.30	8200	3440
L2500	2500	2500	1600	650	200	4.90	11500	3920

Pressure rating chart

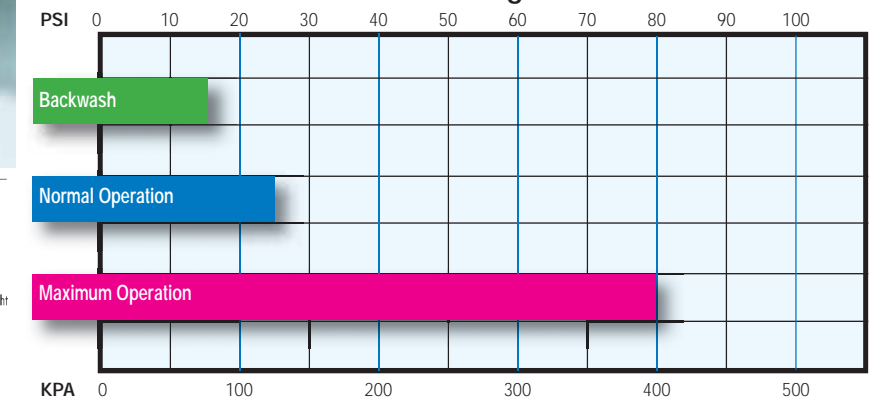

### "H" Series fiberglass side-mounted



"H" Series technical data

Model	Tank dia mm	Length mm	Height (mm)	Filter Area m <sup>2</sup>	Port Size mm
H3000S	1200	3000	1500	3.3	150
H4000S	1200	4000	1500	4.4	150
H5000S	1200	5000	1500	5.5	150
H3000M	1400	3000	1700	3.9	150
H4000M	1400	4000	1700	5.0	150
H5000M	1400	5000	1900	6.0	200
H3000L	1600	3000	1900	4.0	150
H4000L	1600	4000	1900	5.8	200
H5000L	1600	5000	1900	7.5	200

Pressure rating chart

